


Ni-CD 3xAA 600mAh 3.6V



9	组合PVC套 (Shrink Sleeve)	152*26*0.1	1	白色 (White)	广州高胜电子科技有限公司 GODSON TECHNOLOGY CO., LTD	
8	绝缘垫 (Insulating Pad)	AA	2	红岗纸 (Red Hard Paper0		
7	热缩管 (Heat Shrink Tube)	Ø3.5*25	2	黑色 (Black)		
6	连接片 (Connect Tab)	20*4*0.1	2	镀镍片 Nickle Plated Tab)	3.6V AA600 柱型组合图-正向插头 3.6V AA600 STICK TYPE-Forward Connector)	
5	引出片 Lead Tab)	25*4*0.1	2	镀镍片 Nickle Plated Tab)		
4	面圈 (Insulating Pad)	AA	3	白色不干胶 (White Adhesive Sticker)	绘制 (DREW)	
3	插头 (Connector)	JST-VH-2P	1	正向插头 (Forward Connector)	审核 (CHECK)	
2	串联PVC套 (Shrink Sleeve)	151*24*0.1	1	白色 (White)	批准 (APPROVED)	
1	单体电池 (Cell)	AA600	3	Ni-Cd	文件编号: (DOC NO.)	
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)	修改号: (MOD NO.)	页码: (Page)

Dimensions

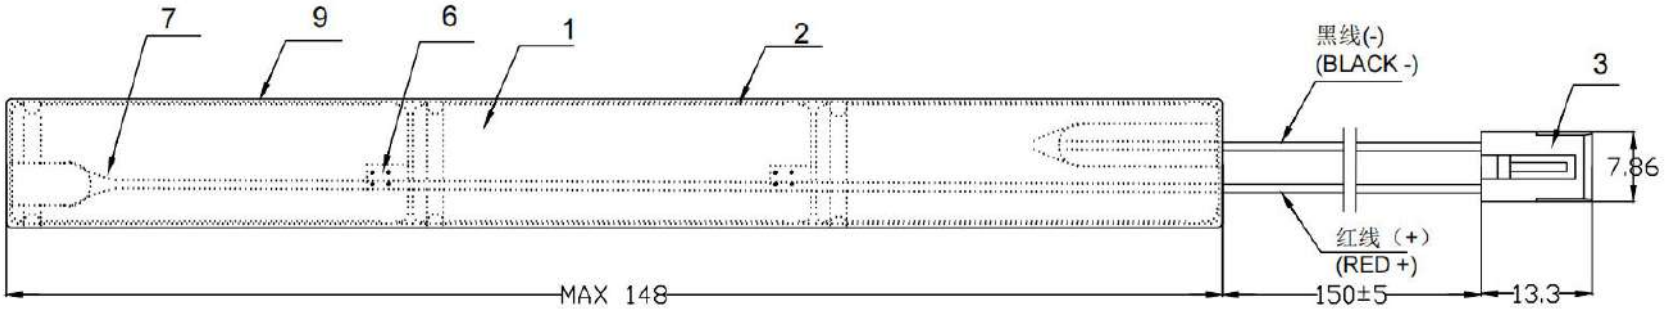


Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

注(NOTE) :

- 1、红线=288mm,黑线=160mm;
线规: UL1015 AWG 18#;
Red wire=288mm,Black wire=160mm;
Wire Model:UL 1015 AWG 18#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、单位: mm
Unit:mm

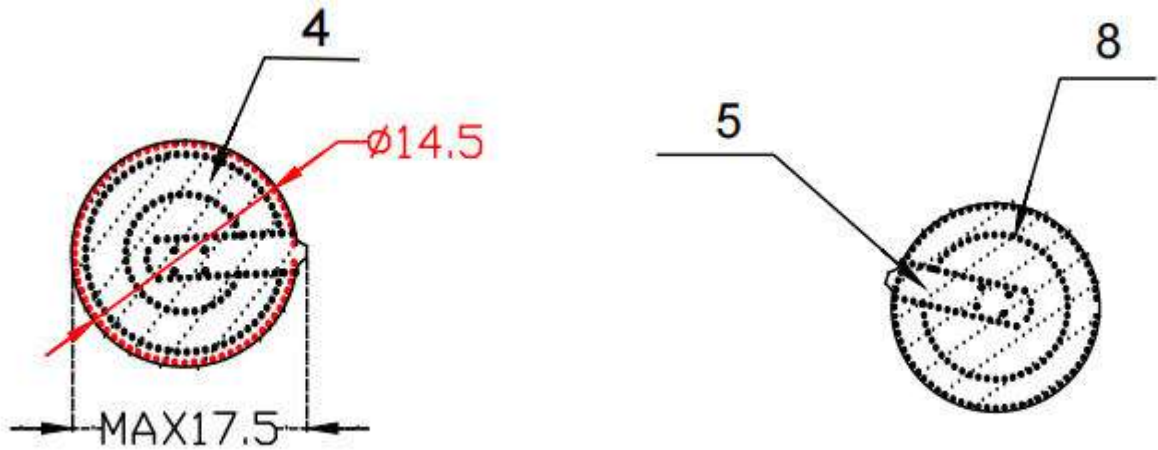


Ni-CD 3xAA 900mAh 3.6V



8	插头 (Connector)	JST-XHP-2P	1	正向插头 (Forward Connector)	广州高胜电子科技有限公司 GODSON TECHNOLOGY CO., LTD	
7	美纹纸 (Textured paper)	38X9X0.1	2			
6	面圈 (Insulating Pad)	AA	3	白色不干胶 (White Adhesive Sticker)	3GS-AA900-A组合图 (3GS-AA900-A TYPE)	
5	组合PVC套 (Shrink Sleeve)	48X70X0.1	1	白色 (White)	绘制 (DREW)	
4	单体PVC套 (Shrink Sleeve)	54X23X0.1	3	白色 (White)	审核 (CHECK)	
3	引出片 (Lead Tab)	25X4X0.10	2	镀镍片 (Nickel Plated Tab)	批准 (APPROVED)	
2	连接片 (Connect Tab)	20X4X0.10	2	镀镍片 (Nickel Plated Tab)	文件编号: (DOC NO.)	
1	单体电池 (Cell)	AA900T	3	Ni-Cd	修改号: (MOD NO.)	页码: (Page)
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)		

Dimensions

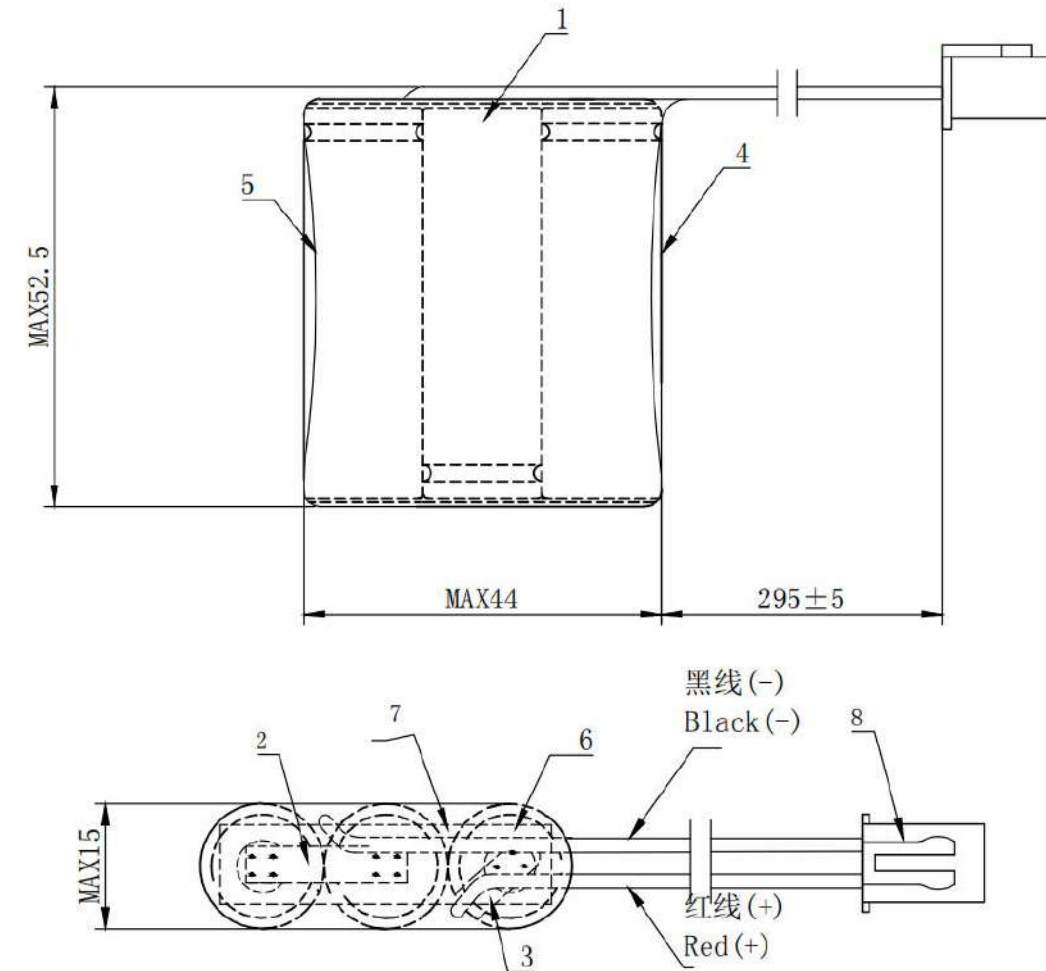


Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

注(NOTE):


- 1、红线=325mm,黑线=365mm;
线规: UL1007 AWG 22#;
Red wire=325mm,Black wire=365mm;
Wire Model:UL 1007 AWG 22#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、单位: mm
Unit:mm

Ni-CD 3xC 2500mAh 3.6V

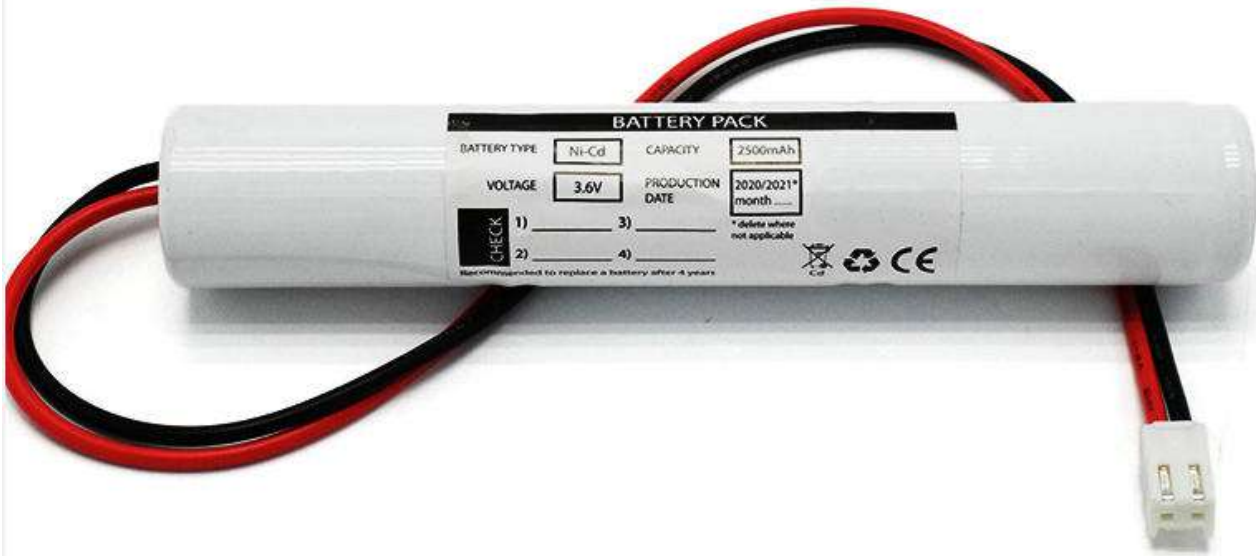

9	组合PVC套 (Shrink Sleeve)	159.5*44*0.1	1	白色 (White)	广州高胜电子科技有限公司 GODSON TECHNOLOGY CO., LTD	
8	绝缘垫 (Insulating Pad)	C	2	红岗纸 (Red Hard Paper0		
7	热缩管 (Heat Shrink Tube)	Ø4*25	2	黑色 (Black)		
6	连接片 (Connect Tab)	30*5*0.1	2	镀镍片 Nickle Plated Tab)	3.6V C2500柱型组合图-反向插头 3.6V C2500 STICK TYPE-Reversed Connector)	
5	引出片 Lead Tab)	30*5*0.1	2	镀镍片 Nickle Plated Tab)		
4	面圈 (Insulating Pad)	C	3	白色不干胶 (White Adhesive Sticker)	绘制 (DREW)	
3	插头 (Connector)	JST-VH-2P	1	反向插头 (Reversed Connector)	审核 (CHECK)	
2	串联PVC套 (Shrink Sleeve)	158.5*42*0.1	1	白色 (White)	批准 (APPROVED)	
1	单体电池 (Cell)	C2500	3	Ni-Cd	文件编号: (DOC NO.)	
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)	修改号: (MOD NO.)	页码: (Page)

Dimensions


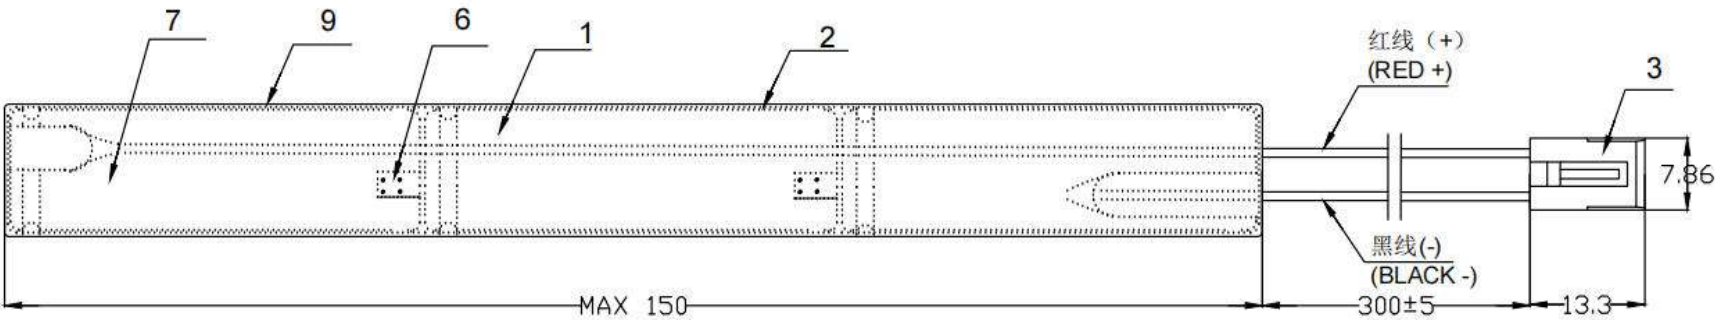


Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

注(NOTE) :

- 1、红线=440mm,黑线=310mm;
线规: UL1015 AWG 18#;
Red wire=440mm,Black wire=310mm;
Wire Model:UL 1015 AWG 18#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、单位: mm
Unit:mm

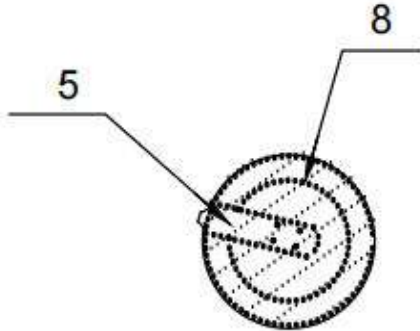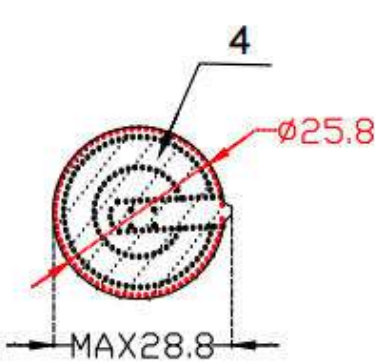


Ni-CD 3xC 2500mAh 4.8V



9	组合PVC套 (Shrink Sleeve)	209.5*44*0.1	1	白色 (White)	广州高胜电子科技有限公司 GODSON TECHNOLOGY CO., LTD	
8	绝缘垫 (Insulating Pad)	C	2	红岗纸 (Red Hard Paper0		
7	热缩管 (Heat Shrink Tube)	Ø4*25	2	黑色 (Black)		
6	连接片 (Connect Tab)	30*5*0.1	3	镀镍片 Nickle Plated Tab)	4.8V C2500 柱型组合图-反向插头 4.8V C2500 STICK TYPE-Reversed Connector)	
5	引出片 Lead Tab)	30*5*0.1	2	镀镍片 Nickle Plated Tab)		
4	面圈 (Insulating Pad)	C	4	白色不干胶 (White Adhesive Sticker)	绘制 (DREW)	
3	插头 (Connector)	JST-VH-2P	1	反向插头 (Reversed Connector)	审核 (CHECK)	
2	串联PVC套 (Shrink Sleeve)	208.5*42*0.1	1	白色 (White)	批准 (APPROVED)	
1	单体电池 (Cell)	C2500	4	Ni-Cd	文件编号: (DOC NO.)	
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)	修改号: (MOD NO.)	页码: (Page)

Dimensions


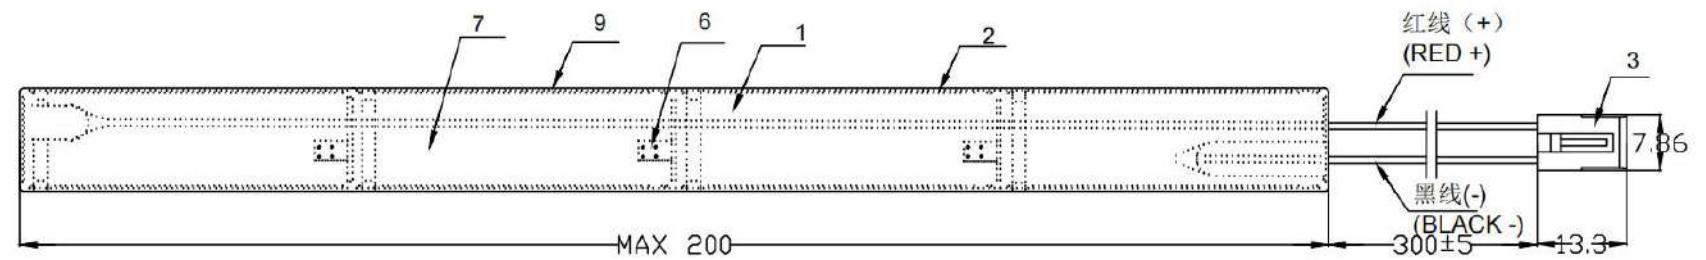


注(NOTE) :

- 1、红线=490mm,黑线=310mm;
线规: UL1015 AWG 18#;
Red wire=490mm,Black wire=310mm;
Wire Model:UL 1015 AWG 18#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、单位: mm
Unit:mm

Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

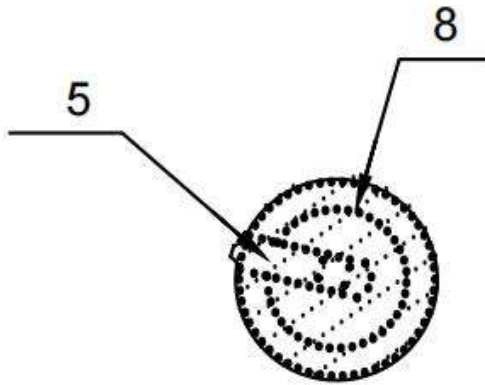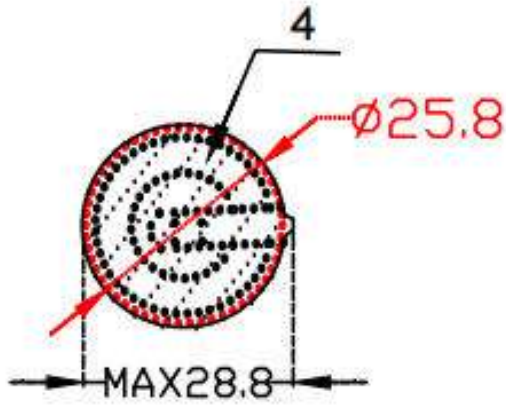


Ni-CD 3xD 4000mAh 3.6V



9	组合PVC套 (Shrink Sleeve)	190*55*0.1	1	白色 (White)	广州高胜电子科技有限公司 GODSON TECHNOLOGY CO., LTD	
8	绝缘垫 (Insulating Pad)	D	2	红岗纸 (Red Hard Paper0		
7	热缩管 (Heat Shrink Tube)	Ø4*25	2	黑色 (Black)		
6	连接片 (Connect Tab)	35*6*0.1	2	镀镍片 (Nickel Plated Tab)	3.6V D4000柱型组合图-反向插头 3.6V D4000 STICK TYPE-Reversed Connector)	
5	引出片 (Lead Tab)	35*5*0.1	2	镀镍片 (Nickel Plated Tab)		
4	面圈 (Insulating Pad)	D	3	白色不干胶 (White Adhesive Sticker)	绘制 (DREW)	
3	插头 (Connector)	JST-VH-2P	1	反向插头 (Reversed Connector)	审核 (CHECK)	
2	串联PVC套 (Shrink Sleeve)	189*52*0.1	1	白色 (White)	批准 (APPROVED)	
1	单体电池 (Cell)	D4000	3	Ni-Cd	文件编号: (DOC NO.)	
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)	修改号: (MOD NO.)	页码: (Page)

Dimensions

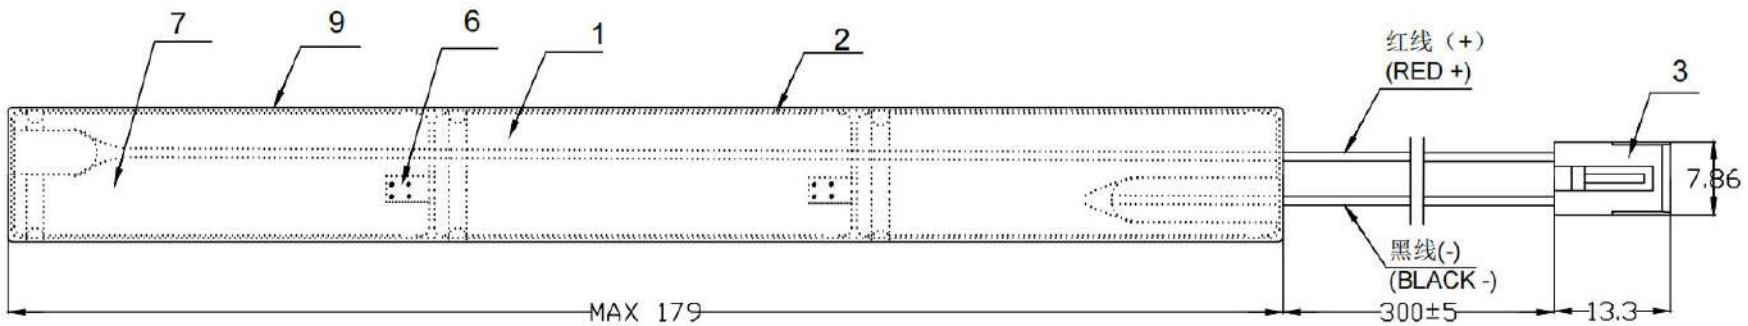


Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

注(NOTE) :

- 1、红线=468mm,黑线=310mm;
线规: UL1015 AWG 18#;
Red wire=468mm,Black wire=310mm;
Wire Model:UL 1015 AWG 18#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、单位: mm
Unit:mm

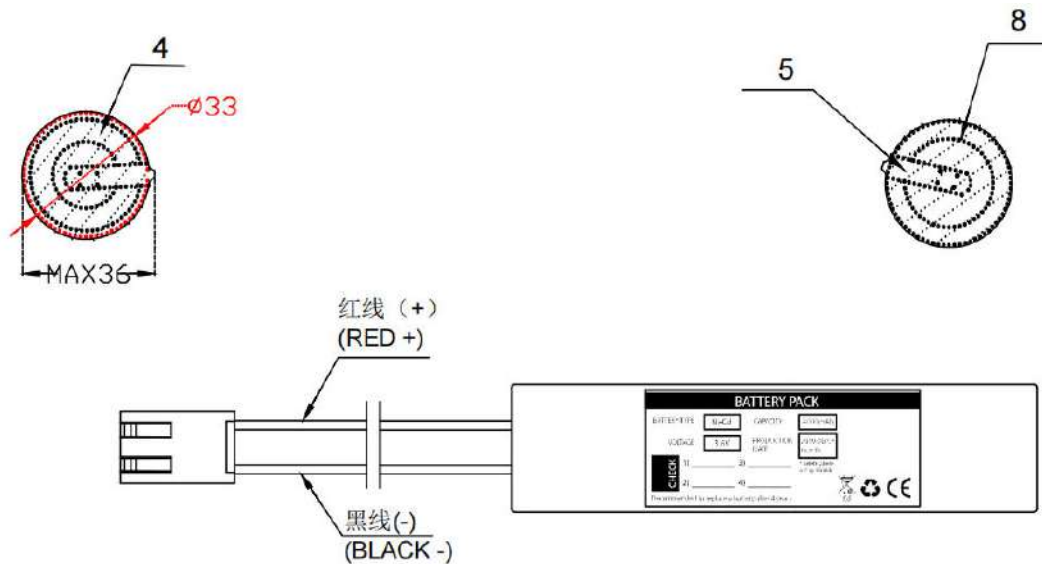


Ni-CD 5x4/3D 7000mAh 6.0V



10	组合PVC套 (Shrink Sleeve)	320X55X0.1	1	白色 (White)	广州高胜电子科技有限公司 GUANGZHOU GODSON TECHNOLOGY CO., LTD		
9	EVA棉 (Adhesive strips)	300X5X1	2	黑色 (Black)			
8	热缩管 (Heat Shrink Tube)	Ø3.5X25	2	黑色 (Black)			
7	引出片 Lead Tab)	35X5X0.10	2	镀镍片 (Nickle Plated Tab)			
6	绝缘垫 (Insulating Pad)	D	2	红岗纸 (Red Hard Paper0	6.0V 4/3D7000-B 柱型组合图 (6.0V 4/3D7000-B STICK TYPE)		
5	组合PVC套 (Shrink Sleeve)	456X55X0.1	1	白色 (White)			
4	面圈 (Insulating Pad)	D	5	白色不干胶 (White Adhesive Sticker)	绘制 (DREW)	方伟 2022.11.03	
3	串联PVC套 (Shrink Sleeve)	455X52X0.1	1	白色 (White)	审核 (CHECK)		
2	连接片 (Connect Tab)	30X6X0.10	4	镀镍片 (Nickle Plated Tab)	批准 (APPROVED)		
1	单体电池 (Cell)	4/3D7000	5	Ni-Cd	文件编号: (DOC NO.)		
序号 (NO.)	材料名称 (Name)	规格 (Size)	数量 (Qty)	备注 (Note)	修改号: (MOD NO.)	页码: (Page)	

Dimensions

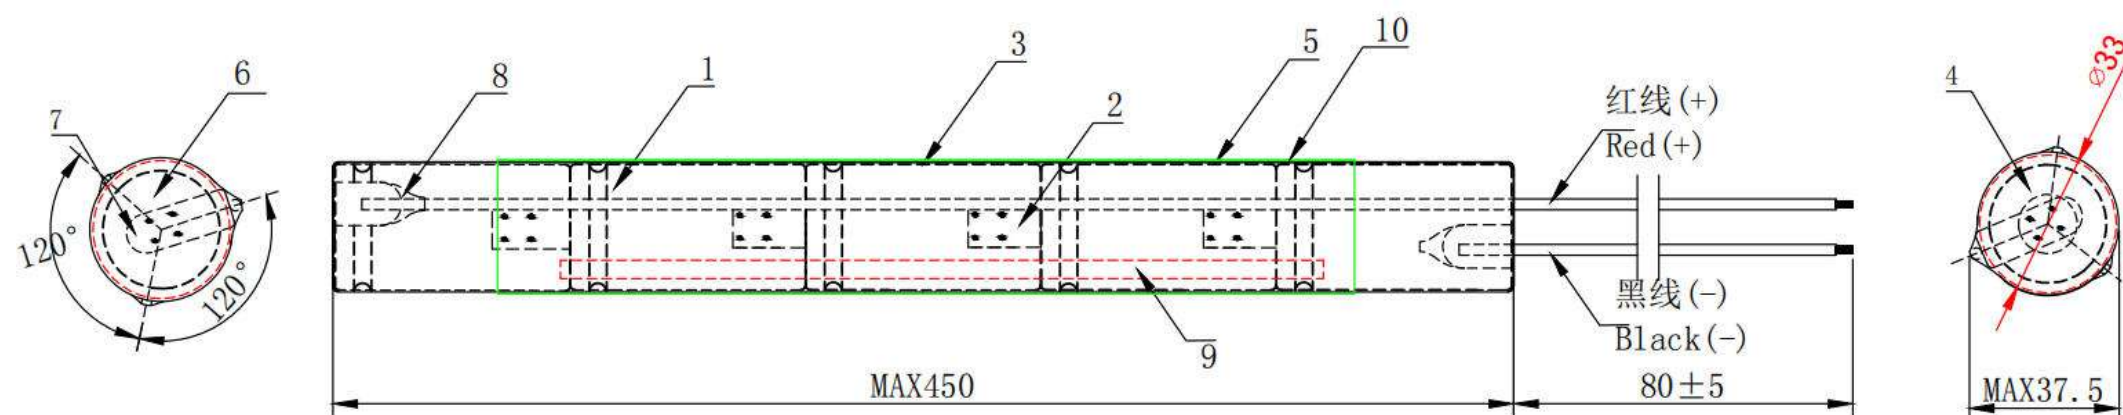

注(NOTE):

- 1、红线=518mm,黑线=95mm;
线规: UL1007 AWG 18#;
Red wire=518mm,Black wire=95mm;
Wire Model:UL 1007 AWG 18#;
- 2、引出片焊线处需套黑色热缩管;
After soldering the tab to the wire,the
tab should be wrapped by heat-shrinking
insulating tube;
- 3、出线末端剥线上锡5mm, 并套绝缘管;
Tin 5 mm on stripping wire at end of outlet and
insulating tube;
- 4、单位: mm
Unit:mm

Features:

- Long service life
- High rate charging and discharging performance
- Wide temperature range
- Good storage performance
- High stability

